

SPIDER 18.95

TRACKED AERIAL WORKING PLATFORMS

EN



PL  **TFORM**
B A S K E T

RAISING THE STANDARD

Made in Italy







SERIES **SPIDER 18.95**

An optimized outreach for our best seller

- Side outreach of 9.5 m
- Available with Kubota Diesel engine and automatic accelerator or in the version endothermic engine + Lithium-Ion batteries or completely electric with batteries
- 230 kg of loading capacity in the basket
- Radio remote control with DISPLAY as standard equipment
- Versatility and modularity in the choice of accessories

- Diagnostic display in the ground panel and PBT (Platform Basket Telematics)
- Total protection of the chassis with steel covers.
- Supplied with air/water and 230Vac in the basket as standard equipment.
- Interchangeable hydraulic winch with 250 kg of loading capacity as optional accessory.

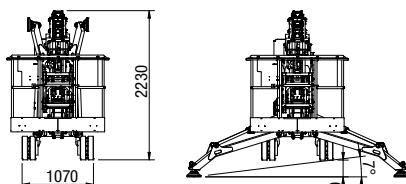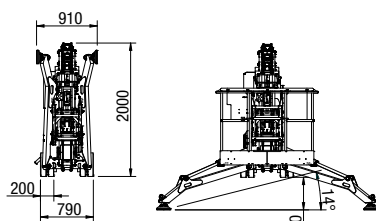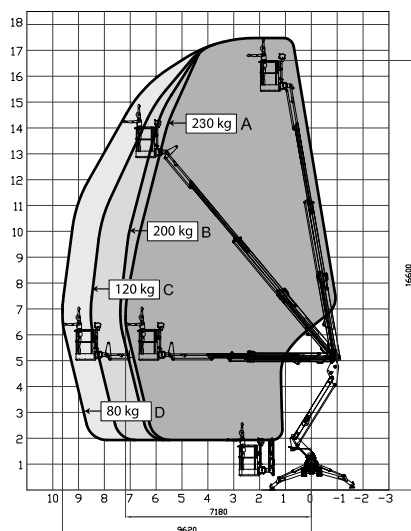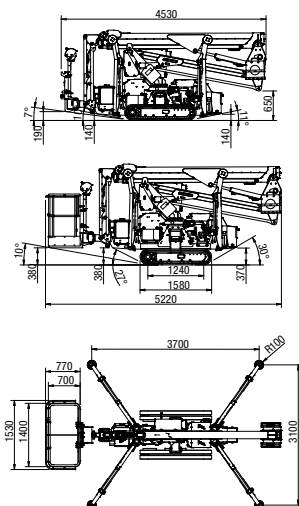

TECHNICAL SPECIFICATIONS		STD	E	ED
Maximum working height	m	17,50		
Floor height	m	15,50		
Maximum side outreach (80kg)	m	9,50		
Maximum side outreach (120kg)	m	8,60		
Rotation angle of the tower	°	360		
Aluminium basket dimensions	m	1,40 x 0,70		
Basket rotation angle	°	70+70		
Maximum capacity of basket	Kg	230		
Length closed (basket disassembled)	m	5,22 (4,53)		
Minimum width closed	mm	790		
Minimum height closed	mm	2000		
Overall dimensions Stabilization	m	3,10 x 3,70		
Maximum horizontal inclination	degrees/%	16° (29%)		
Maximum side inclination	degrees/%	17° (31%)		
Maximum speed	Km/h	1,5/2,5	0,8/1,6	1,5/2,5
WEIGHTS		STD	E	ED
Weight in work conditions*	Kg	2.530*	2.430*	2.630*
Ground pressure stowed machine	KN/m²	3,70		
Ground pressure when on stabilizers	KN/m²	2,22		
Max point load on one stabilizer	KN	17,40		
POWER		STD	E	ED
Honda iGX390 petrol engine	HP/rpm	13/3600	-	13/3600
Z482 Kubota diesel engine	HP/rpm	13/3200	-	13/3200
Electric Motor 230Vac/50Hz (110Vac/60Hz)	CV/KW	3/2,20 (2/1,50)	3/2,20 (2/1,50)	3/2,20 (2/1,50)
Electric Motor 24 Vdc	CV/KW	-	4,8/3,5	4,8/3,5
Traction battery capacity	24Vdc Lead Acid 24Vdc Lithium Ion	Ah	-	210 150

* Subject to change depending on configuration.